DIRECT DRAW DISPENSER



PRO-LINE™ 25" - 1 KEG - DIGITAL THERMOSTAT

- Designed by beer-industry experts for performance and value.
- Digital thermostat for precision temperature control.
- Full-size drain tray larger work area and improved hygiene.
- Commercial grade construction built to last.





Adjustable Digital Thermostat! Easy to read exterior mounted





Listed by Edison Testing Laboratories. Conforms to UL & NSF Standards.

www.micromatic.com • 1 (866) 327-4159

PRO-LINE™ 25" - 1 KEG

Job Number: Location:





Part No.	Finish	Doors	Shipping Weight
□ MDD23-E	Black	1	78 kg
			172 lbs


Operating Performance


Capacity of 1/2 Kegs	1
Cubic Feet (liters)	8.4 (239)
Number of Draft Towers	1
Number of Faucets	1
Beer Tower Approval	NSF 7.0 and NSF 18
Approval	ETL Listed
Compressor HP	1/10

Running Amps	1.5
Voltage	115/60/1
Plug Type	NEMA-5-15P
Cord Length	8'
Refrigerant	R290
Charge oz	2.8
Thermostat	Digital, adjustable

Exterior	All Models:18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back. Black Vinyl Models: Front, sides. Stainless Steel Models: Front, sides	
Interior	20 gauge stainless steel floor, reinforced frame, 24 gauge galvanized walls	
Ventilation	Back ventilated	
Plumbing	Drain Tray: 3/4" NPT drain includes hose and drain bottle. Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.	
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor.	
Casters	Standard	

Dimensions

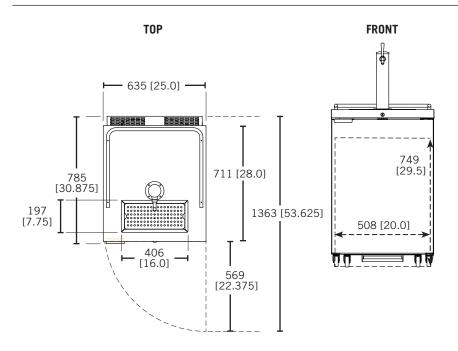





Toll-Free: 1-866-327-4159 www.micromatic.com

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363

Southeast

15111 Dispense Ln. Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466